




SERIE **036-10D**

PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN



Interchangeability - Kompatibilität

Temperature Range - Temperaturbereich
-20°C +100°C (-4°F +212°F)

Working Pressure - Betriebsdruck
036 - Brass - Messing: 35 Bar - (508 PSI)
036S - St. Steel - Edelstahl: 70 Bar - (1015 PSI)

Flow capacity - Nennweite
NW - 9,5

Material - Material - B

(Nickel Plated Brass - Messing Vernickelt)



- Coupler Body - Kupplungsgrundkörper : Brass Nickel Plated - Messing vernickelt
- Sleeve - Hülse : Brass Nickel Plated - Messing vernickelt
- Valve - Ventil : Brass - Messing
- Springs - Federn : Stainless Steel - Edelstahl
- Balls - Kugeln : Stainless Steel - Edelstahl
- Seals - Dichtungen : Fluorocarbon FPM (V)

Plug - Nippel : Brass Nickel Plated - Messing vernickelt

Material - Material - S6


(Stainless Steel - Edelstahl (AISI- 316))

- Coupler Body - Kupplungsgrundkörper : Stainless Steel - Edelstahl (AISI- 316)
 - Sleeve - Hülse : Stainless Steel - Edelstahl (AISI- 316)
 - Valve - Ventil : Stainless Steel - Edelstahl (AISI- 316)
 - Springs - Federn : Stainless Steel - Edelstahl
 - Balls - Kugeln : Stainless Steel - Edelstahl
 - Seals - Dichtungen : Fluorocarbon FPM (V)
- Plug - Nippel : Stainless Steel - Edelstahl (AISI- 316)**

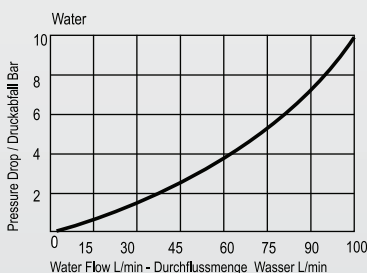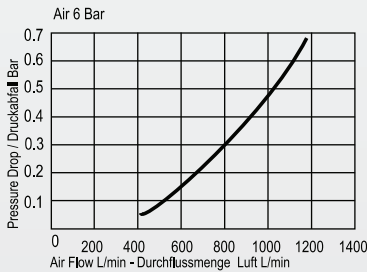


Couplers and Plugs
Kupplungen und Nippel

Connection Anschlüsse Ø	Order No Bestellnr.	SW	L	ØD
----------------------------	---------------------	----	---	----




Male Threaded Coupling
Kupplung mit Aussengewinde

BSP 1/4"	036.10 RGD 13	25	68,8	28
BSP 3/8"	036.10 RGD 17	25	68,8	28
BSP 1/2"	036.10 RGD 21	25	72,8	28




Female Thread Coupling
Kupplung mit Innengewinde

BSP 1/4"	036.10 DGD 13	25	62,8	28
BSP 3/8"	036.10 DGD 17	25	62,8	28
BSP 1/2"	036.10 DGD 21	25	65,8	28




Standard Hose Barb Coupling
Kupplung mit Schlauchtülle

9 mm - 5/14"	036.10 HGD 09	25	77,8	28
10 mm - 3/8"	036.10 HGD 10	25	77,8	28
13 mm - 1/2"	036.10 HGD 13	25	77,8	28




Male Thread Plug
Nippel mit Aussengewinde

BSPT 1/4"	036.10 RUD 13	25	69,1	28
BSPT 3/8"	036.10 RUD 17	25	69,1	28
BSPT 1/2"	036.10 RUD 21	25	73,1	28



Female Thread Plug
Nippel mit Innengewinde

BSP 1/4"	036.10 DUD 13	25	63,3	28
BSP 3/8"	036.10 DUD 17	25	63,3	28
BSP 1/2"	036.10 DUD 21	25	67,3	28



Standard Hose Barb Plug
Nippel mit Schlauchtülle

9 mm - 5/14"	036.10 HUD 09	25	78	28
10 mm - 3/8"	036.10 HUD 10	25	78	28
13 mm - 1/2"	036.10 HUD 13	25	78	28